

Amenities Block 2 Replacement and Pool & Landscaping Refurbishment




AMENITIES BLOCK 2 REPLACEMENT

&

POOL & LANDSCAPE REFURBISHMENT

TENDER & METHODOLOGY & DESCRIPTIVE CPM FOR TENDER SUBMISSION

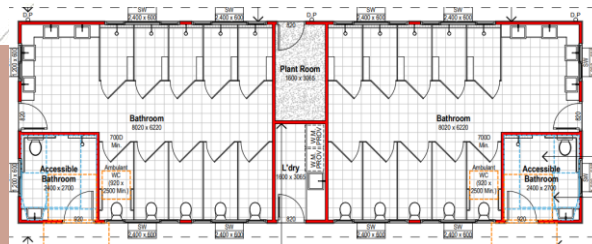

BY

ROCKBUILD GROUP

Amenities Block 2 Replacement and Pool & Landscaping Refurbishment

Introduction

This document outlines Rockbuild's methodology as principal contractor to YMCA Yarramundi Projects to completion and ensure the works satisfy the requirements as designed by all documents provided by the client and relevant standards and codes.

The Contract works include Demolition, Civil Works, Concrete Works, Partitioning Works, Electrical Services, Hydraulics Services, Structural Components, Roofing Works, Tiling Works, Carpentry Works and Painting Works.

Rockbuild's Background

Rockbuild has a highly experienced team that has delivered a multitude of key projects within live environments including retirement villages, retail, residential and commercial works. Specifically, Rockbuild have completed works in many Live locations with respect to Amenities and complete Pool replacements and Renovations in Sydney and the Central Coast for Stockland and AVEO retirement villages , Westfield shopping Centres and many more

Our key component is the collaboration and high-level communication with all stakeholders involved within each project. This has been our core approach to deliver successful projects without incidents including works in all 3 Eastern States for the last 12 years.

Rockbuild has an unblemished record of successfully completing works throughout every building within the Commercial Sector including refurbishments, fit out works and construction of specialist projects such as the 50-metre x 4.5-metre-high Acoustic Green wall between 2 buildings at Cardinal Freeman Village in Ashfield Plus the completion of Countless Stockland and Aveo and Westfield Refurbs/Fit outs for Multiple centres across all Eastern States

Over the course of the last 14 years working within the Commercial Sector, Rockbuild has built a great working relationship with all Stakeholders including the managers within we have operated with. This has been a vital factor in delivering quality work, with minimal disruptions and within the project timelines. Rockbuild understand that proper Communications is the foundation to these relationships.

Rockbuild understand the importance of the Quality outcomes required to satisfy all Stakeholders,. We will proceed to work with a level of finely focused detail and quality to deliver on what will be an impressive project upon completion.

SECTION 2 TENDER SCHEDULES

TENDER FORM

Tenderer's Details

Company Name:	Rockbuild Developments Pty Ltd (AKA Rockbuild Group)
ACN:	147 537 282
ABN:	99 147 537 282
Address:	1 Arab Road Padstow NSW 2211
Contact Person:	Jim Kaplanis
Mobile No.:	0466 489 896
Email:	jim@rockbuildgroup.com.au

OFFER

To: YMCA NSW

EXECUTED on the date set out below

Rockbuild Developments Pty Ltd

The Tenderer

99 147 537 282

(ABN) (ACN)

1 Arab Road Padstow NSW 2211

of Address of Tenderer

10th of July 2024

On Date

1. in accordance with the Conditions of Tendering offers to carry out the Services set out and described in the RFT in strict conformity with the requirements of the RFT for the Fee tendered by the Tenderer.
2. represents that:
 - (a) the Tenderer has examined carefully and has acquired actual knowledge of the contents of the RFT and the other information made available in writing by the Principal to the Tenderer for the purpose of tendering;
 - (b) the information supplied by it in the Tender Schedules and the documents attached to the Tender Schedules are accurate and correct;
 - (c) the Tenderer can and, if selected as the Consultant, will:
 - (i) comply with all insurance obligations set out in the Agreement; and
 - (ii) comply with all occupational health and safety obligations set out in the Agreement;
 - (d) the Tenderer has examined all information relevant to the risks, contingencies and other circumstances having an effect on its tender and which is obtainable by the making of reasonable enquiries including the material contained in the Tender Documents, the material made available for the information of the

Amenities Block 2 Replacement and Pool & Landscaping Refurbishment

Tenderer, any technical advice made available the Principal and the terms and conditions of any Approval relevant to the Services;

- (e) the Tenderer has:
 - (i) examined the Project site and its surroundings, conditions and characteristics;
 - (iii) satisfied itself as to the access to the site, physical restrictions, environmental, health and safety requirements and the requirements for permits, consents and approvals; and
 - (iv) made an appropriate allowance in its tender for any effect thereon;
 - (f) the Tenderer has based its tender on its own investigations, determinations and assessment of the risks involved in carrying out the Services and carried out any further investigations necessary to provide adequate information for the purpose of tendering;
 - (g) the Tenderer has examined all statutory and regulatory requirements relevant to the Services and satisfied itself of its capacity to execute the Services in accordance with the terms and conditions of the Agreement without breaching any such terms, conditions, requirements, orders, regulations, rules, directions and practices;
 - (h) the Tenderer has satisfied itself as to the correctness and sufficiency of its tender for the Services and that its price covers the cost of complying with all of its obligations under the Agreement;
 - (i) the Tenderer has examined the PPR and Scope of Services and satisfied itself of its capacity to execute the Services in accordance with these documents and that its lump sum Fee covers the cost of complying with all of its obligations under the PPR and Scope of Services.
3. agrees to abide by and hold firm all of the terms and prices in its offer for a period of ninety (90) calendar days from the expiration of the closing date for tenders and these terms and prices will remain binding upon the Tenderer and may be accepted at any time by the Principal before the expiration of that period. The agreement contained in this paragraph is made in consideration of the administrative time and expense to the Principal in evaluating the Tenderer's offer.

EXECUTED by

Rockbuild Developments Pty Ltd
Company Name

147 537 282
ACN

In accordance with s.127(1)(c) of the Corporations Act 2001.

Director/Company Secretary

Dimitrios (Jim) Kaplanis
Full name

c/o 1 Arab Road Padstow NSW 2211
Usual address

EXPERIENCE OF KEY PERSONNEL

Please nominate the Key Personnel you are proposing to be available to provide the Works, together with a summary of their skills, qualifications and experience.

Key Person	Skills, qualifications & experience directly related to the specified Works.
Joe Hanna	State Manager (licensed Builder) – will operate as Project Director for these works, overseeing all aspects and budgets – 20 years experience
Raymond Azar	Building & Construction Manager (licensed Builder) – will manage all aspects of the building works – 30+ years of experience
Bailey Pimentel	Contract Administrator – will oversee all administration and purchasing for the works – 5 years experience

MANAGEMENT SYSTEMS



global-mark®

Certificate of Approval

This certificate confirms that the company below complies with the following standard:

Company Name	Rockbuild Developments Pty Ltd		
Company Other Name	RockBuild Group		
Client ID	104658	Scheme	Quality Management Systems Scheme
Certification Standard	AS/NZS ISO 9001-2016: Quality management systems - Requirements		
Scope of Certification	Residential and commercial construction		
Type of Certification	Management System		

CERTIFICATE DATES:

Original / Initial	20/07/2018	Last Certificate update	27/03/2024
Certification / Re Certification	8/03/2024	Expiry	27/03/2027
Last Certification Decision	27/03/2024		

APPROVED COMPANY/SITE ADDRESS(ES):

1 Arab Road Padstow NSW 2211 Australia

The use of the Accreditation Mark indicates accreditation by the Joint Accreditation System of Australia and New Zealand in respect to those activities covered by JAS-ANZ accreditation. Refer to www.jasanz.org/register for verification.

This certification remains valid until the above mentioned expiry date and subject to the organisation's continued compliance with the certification standard, and Global-Mark's Terms and Conditions.

This Certificate of Approval remains the property of Global-Mark Pty Ltd, Company Number: ACN.108-087-654



Certification Manager

Unique Certificate Code: AFA8A7AD472B66DCCA258AE1002BA1D0

Global-Mark Pty Ltd, Copyright 2005 - 407, 32 Delhi Road, North Ryde NSW 2113, Australia

Amenities Block 2 Replacement and Pool & Landscaping Refurbishment



Certificate of Approval

This certificate confirms that the company below complies with the following standard:

Company Name	Rockbuild Developments Pty Ltd		
Company Other Name	RockBuild Group		
Client ID	104658	Scheme	Environmental Management Systems Scheme
Certification Standard	AS/NZS ISO 14001-2016: Environmental management systems - Requirements with guidance for use		
Scope of Certification	Residential and commercial construction		
Type of Certification	Management System		

CERTIFICATE DATES:

Original / Initial	20/07/2018	Last Certificate update	27/03/2024
Certification / Re Certification	8/03/2024	Expiry	27/03/2027
Last Certification Decision	27/03/2024		

APPROVED COMPANY/SITE ADDRESS(ES):

1 Arab Road Padstow NSW 2211 Australia

The use of the Accreditation Mark indicates accreditation by the Joint Accreditation System of Australia and New Zealand in respect to those activities covered by JAS-ANZ accreditation. Refer to www.jasanz.org/register for verification.

This certification remains valid until the above mentioned expiry date and subject to the organisation's continued compliance with the certification standard, and Global-Mark's Terms and Conditions.

This Certificate of Approval remains the property of Global-Mark Pty Ltd, Company Number: ACN.108-087-654



Global-Mark.com.au®

JAS-ANZ



WWW.JAS-ANZ.ORG/REGISTER



Certification Manager

Unique Certificate Code: 91AB1636BDC0DB53CA258AE1002B8DE9

Global-Mark Pty Ltd, Copyright 2005 - 407, 32 Delhi Road, North Ryde NSW 2113, Australia

Amenities Block 2 Replacement and Pool & Landscaping Refurbishment



global-mark®

Certificate of Approval

This certificate confirms that the company below complies with the following standard:

Company Name	Rockbuild Developments Pty Ltd		
Company Other Name	RockBuild Group		
Client ID	104658	Scheme	Occupational Health and Safety Management System
Certification Standard	AS/NZS ISO 45001-2018 : Occupational health and safety management systems - Requirements with guidance for use		
Scope of Certification	Residential and commercial construction		
Type of Certification	Management System		

CERTIFICATE DATES:

Original / Initial	26/04/2022	Last Certificate update	27/03/2024
Certification / Re Certification	8/03/2024	Expiry	27/03/2027
Last Certification Decision	27/03/2024		

APPROVED COMPANY/SITE ADDRESS(ES):

1 Arab Rd Padstow NSW 2211 Australia

The use of the Accreditation Mark indicates accreditation by the Joint Accreditation System of Australia and New Zealand in respect to those activities covered by JAS-ANZ accreditation. Refer to www.jasanz.org/register for verification.

This certification remains valid until the above mentioned expiry date and subject to the organisation's continued compliance with the certification standard, and Global-Mark's Terms and Conditions.

This Certificate of Approval remains the property of Global-Mark Pty Ltd, Company Number: ACN.108-087-654



Global-Mark.com.au®

JAS-ANZ



WWW.JAS-ANZ.ORG/REGISTER



Certification Manager

Henri Hoban

Unique Certificate Code: 58FC62E92444BDACCA258AE1002B963B

Global-Mark Pty Ltd, Copyright 2005 - 407, 32 Delhi Road, North Ryde NSW 2113, Australia

INSURANCE & LICENCING

- Contract Works:
- Public Liability
- Workers Compensation



000086
ROCK BUILD DEVELOPMENTS PTY LTD
PO Box 299
PADSTOW NSW 2211

Receipt No: 1-8065621873
Receipt Date: 13/08/2021
Receipt Amount: \$1710.82
Licence Number: 251434C

Note: This is also a Tax Invoice. Please retain this letter for future tax purposes if required

Dear Licence Holder,

Please find attached your Contractor Licence card under the Home Building Act 1989 (The Act).

Your rights as a Contractor Licence holder are:

- You may contract and advertise to carry out work for which the licence has been issued;
- You have access to the NSW Civil and Administrative Tribunal when doing residential building work to resolve disputes with licensed contractors and consumers.

Your statutory responsibilities as a Contractor Licence Holder are:

- All work where the reasonable market value of the combined labour and material costs exceed \$5,000 must have a written contract;
- All contracts must show the names of the contractor and the consumer and must include the licence holder's name, licence number, contract price, plans and specifications (where applicable) and relevant warranties required by the Act. You can download a contract for free from the Fair Trading website;
- You are not permitted to request a deposit for more than 10% of the contract price;
- Individuals holding a licence as a Builder or Swimming Pool Builder must do Continuing Professional Development (CPD) to renew their licence. Details can be found on the Fair Trading website.

This licence is valid until the expiry date shown and is renewable upon application. A renewal notice will be forwarded to you in advance of the expiry date. The licence will remain current until the expiry date specified unless it is sooner suspended, cancelled or surrendered.



Please detach and sign immediately in ink in the space provided on the card.

Amenities Block 2 Replacement and Pool & Landscaping Refurbishment



31/05/2024

ROCKBUILD GROUP
1 Arab Road
PADSTOW NSW 2211

Dear DANNY

RE: Insurance
Name Of Insured **ROCK BUILD DEVELOPMENTS PTY LTD**
Policy Type: **Contract Works**
Insurer Policy Number: **181026140CAR**

Please find enclosed a copy of your policy documents for the above Insurance.

As part of one of Australia's largest insurance networks, our commitment is to offer you the very best insurance solutions by providing Trust, Advice, Value and Choice.

Please read the documents carefully to familiarise yourself with all aspects of your cover and to confirm it accurately and adequately reflects your requirements.

Once again, thank you for your business.

Yours faithfully,

Melissa Clarke
Authorised Representative No: 1295002
Ricketson Consultancy Pty Ltd T/as Ricketson Insurance
PO Box 633
NORTH SYDNEY NSW 2060

P: 0415 238 138
E: melissa@ricketsoninsurance.com.au



Workers Insurance

Certificate of currency

002288 2685 EMAIL
Leonel Giovannini
ROCK BUILD DEVELOPMENTS PTY LTD
PO Box 299
PADSTOW NSW 2211

Issue date:

25/05/2024

Statement of coverage

The following policy of insurance covers the full amount of the employer's liability under the *Workers Compensation Act 1987 (NSW)*.

Employer name:	Policy number:	Valid:
ROCK BUILD DEVELOPMENTS PTY LTD	112445501	30/06/2024 - 30/06/2025
Business name:	ABN:	ACN:
ROCKBUILD GROUP	99 147 537 282	147 537 282
Claims Service Provider :		
EML		

Industry classification number (WIC) ²	Number of workers ³	Wages/units ⁴
411300 Non-Residential Building Construction	25	\$1,507,662.56

- Coverage starts from the time the policy was incepted by the Employer or their Authorised Representative on the first day of cover
- The policy covers all workers employed by the entity named on this certificate while undertaking its primary business activity or any other activities ancillary to its primary business activity as required.
- Number of workers includes contractors/deemed workers.
- Total wages/units estimated for the current period.

Important information

Principals relying on this certificate should:

- ensure a statement under section 175B of the *Workers Compensation Act 1987 (NSW)* is attached
- ensure proper workers compensation insurance is in place
- compare the number of workers on site to the average number of workers estimated
- ensure that the wages are reasonable to cover the labour component of the work being performed
- confirm that the description of the industry/industries noted is appropriate

If the principal contractor has failed to obtain a statement or has accepted a statement where there was reason to believe it was false, they may become liable for any outstanding premium of the sub-contractor.

Did you know that an **excess, equivalent to the first week of compensable payments**, may be payable if notification of a claim is not provided to your insurer within five calendar days of when you became aware of the injury.

Yours faithfully

Peter Meighan
Underwriting Operations Manager
icare Workers Insurance

Amenities Block 2 Replacement and Pool & Landscaping Refurbishment



Berkshire Hathaway
Specialty Insurance

Certificate of Currency

Policy Number: 47-ZCA-321388-03

Insured: Rock Build Developments Pty Ltd
Raymond Azar, Rockbuild Developments

Class of Insurance: Public and Product Liability

Period of Insurance: 4.00pm on the 30 April 2024 to 4.00pm on the 30 April 2025

Limit of Liability: \$20,000,000 any one Occurrence and in the aggregate during the Period of Insurance in respect of Product liability.

Policy Wording: BHSI-AUS-CA-ACLT-001-05/2017

Location: As Agreed

Interested Party(ies): N/A

Remarks: N/A

Signed By: Jesse Kaye

Date: 30th April 2024

Insurer: Berkshire Hathaway Specialty Insurance Company
(Incorporated in Nebraska, USA) ABN 84 600 643 034 AFSL 466713

This certificate of currency is issued as a matter of information only and confers no rights upon the holder or anyone else. This certificate of currency is only a summary of the cover provided, and is current only on the date of its issuance. This certificate of currency does not amend, alter or extend any of the cover, terms or conditions in the policy referenced above. For full particulars reference is made to cover, terms and conditions detailed in the current policy wording.

SCOPE & TENDER PRICE –AMENITIES BLOCK 2

Item	Specific Scope	Price (\$)
PRELIMINARIES & MARGIN	1) Allow to satisfy all condition of DA0167/21, dated 8/11/2021. Refer DA Matrix for allocation of responsibility. 2) Allow for all provisions set out in the Minor Works Contract. 3) Allow to coordinate Hawkesbury City Council & PCA inspections as required. 4) Allow to satisfy requirements of PCA to obtain Occupancy Certificate. 5) Contractor advertising signage will not be permitted.	\$79,057.00
DESIGN & CONSULTANT FEES	6) Allow to finalise levels of the concrete access path surrounding the amenities In Compliance With AS1428.1. Minimum width of path to be 1.25m	\$3,600.00
DEMOLITION, EXCAVATION & FILL	7) Allow for all temporary disconnection / isolation of river water, potable water, gas, sewer, stormwater and power. 8) Allow to remove and dispose any GSW Asbestos Fill as a provisional sum. Supply tipping dockets to validate tonnage and any claim against the provision sum. 9) Allow for new fill to depth of 450mm under new slab and footpath. Ensure compliance with DA Condition 35.	PC SUM \$15,000.00 \$15,000.00
FORM, CONCRETE, REO	10) Per Structural Details.	\$77,400.00
PEST CONTROL	11) Allow for Termimesh Code Spec 1.11.5 or Similar 12) Allow Termiflange Code Spec 2.1a5 or Similar	\$2,700.00
TIMBER FRAME	13) Per Structural Details	\$40,520.00
INSULATION	14) Allow for insulation in walls R2.0 15) Allow for insulation in roof R3.5	\$5,985.00
ROOF AND WALL CLADDING	16) Allow for BAL 29 Rating requirements including a) Mesh screens b) Gutter guard c) Metal sheeting to timber doors exterior. d) Gutters from Colourbond. e) Downpipes from PVC painted. 17) Internal Wall & Ceiling cladding a) 9mm Villaboard to all walls b) 13mm Aquacheck to Ceilings	\$39,947.00 \$27,387.00
SCREED, WATERPROOFING, TILING.	18) Allow for: a) Floor tile supply & install to all floors except Plant Room. Tiled floor area circa. 113 sqm b) Concrete to plant room floor. c) Linear drain d) Full height wall tiling. Tiled wall area circa. 255 sqm	\$76,549.00

Amenities Block 2 Replacement and Pool & Landscaping Refurbishment

HYDRAULIC (WATER, SEWER, GAS)	19) Per design and specification.	\$81,000.00
ELECTRICAL	20) Allow for new sub-meter board, attached to new post circa. 5 metres from amenities block (not wall mounted on amenities block). 21) Allow for new power, lighting, emergency lights, smoke alarms, bollard and lights.	\$43,200.00
WINDOWS AND DOORS	22) Allow for x4 sliding windows (2,400 x 300) in lieu of (2,400 x 600) located above showers. Raise RL of x4 to avoid foal with shower rose. 23) Allow to satisfy BAL ratings. 24) Allow for window and door furniture 25) Allow for commercial grade door closers to x2 bathroom doors. 26) Aluminium meshed fly screens to all windows & doors (except plant room) 27) Glazed doors to be obscure glazing.	\$33,435.00
SHOWER / TOILET PARTITIONS	28) Allow for 2400 height shower and toilet partitions. 29) Allow to submit shop drawings to the Superintendent for review/ approval.	\$72,000.00
PAINTING	30) Per Specification.	\$7,920.00
FIXTURES & FITTINGS SUPPLY	Price to include: 31) WC 32) Basins & Basin Mixers 33) Shower Rose & Mixer (stage 1 selection not suitable) 34) Soap Holders (1 per shower) 35) Grab Rails 36) Statutory Signage 37) Hand Dryer x4 (2 per bathroom mounted on wall near entry door)	\$33,387.00
TOTAL	CONTRACT SUM ex GST	\$639,087.00
PC SUM	Allow to remove and dispose any GSW Asbestos Fill	\$15,000.00
EXCLUSIONS	38) x4 Sliding Windows (2,400 x 600), supplied by Principal. 39) Toilet Roll Dispensers supplied and installed by YMCA 40) The Principal will engage and appoint the Accredited Certifier (AC) and Principal Certifying Authority (PCA) fees and procure the Construction Certificate (Urban City Certifying). 41) The Principal will fund the LSL and Contribution Payment. 42) Refer DA Matrix for items by the Principal	N/A

The Tenderer represents and warrants that it has allowed in the Price and the components of the Price shown in this Lump Sum Fee Breakdown for all costs and expenses it will incur in performing the Works. The Tenderer acknowledges that the engagement for the entire duration of the Project is dependent upon government approval of the Project being obtained. Should the Project not be approved for any reason whatsoever, and without affecting any other right the Principal may have, the Principal may discontinue the engagement.

TENDER SCOPE & PRICE – POOL REFURBISHMENT

Item	Scope	Price ex GST (\$)
PRELIMINARIES & MARGIN	1) Allow to secure site area noting works within a live environment. Note no contractor advertising signage will be permitted on site. 2) Allow for all provisions set out in the Minor Works Contract.	\$43,243.00
DESIGN & CONSULTANT FEES	3) Allow to prepare return performance brief and accompanying concept design drawings by a registered landscape architect for Principal review/ approval. 4) Allow for 2 iterations of design.	\$7,200.00
EMPTY AND CLEAN	5) Allow to empty pool and dispose water legally. 6) Remove accessories (lights, ladder, skimmer basket etc.) 7) Clean pool thoroughly and prep surface to create a suitable substrate.	\$12,900.00
RESURFACE POOL	8) Apply primer coat to enhance adhesion. 9) Apply new surface from 2-part epoxy according to manufactures guidelines, ensure proper coverage and uniform finish. Allow surface to cure properly. 10) Apply sealant or finishing coat as required. 11) ALTERNATIVE FINISH – IN QUARTZ/GLASS RENDERED IN ARCTIC FINISH COLOUR TBA – ADD \$21,000	\$57,529.00
WATERLINE TILE	12) Supply and install waterline tile, 600 wide band.	\$10,800.00
PUMP SYSTEM AND LINES.	13) Remove and disposed existing pumps system (pump and lines). 14) Supply and installed new pump system of suitable duty and a reputable brand (indicate brand in tender submission).	\$20,940.00
PUMP & STORE ROOM	15) Replace pump house with new structure, double the size of existing pump house. Allow for 2 compartments each with their own door including x2 heavy duty key code locks. 1 compartment for the pump and 1 compartment for storage. 16) Allow to run power to both rooms, and fit off x2 DGPOs in each room. 17) Allow for Colour bond cladding (to match adjacent cabin), with sound insulation and internal lining.	\$16,360.00
POOL COVER.	18) Allow to replace retractable pool cover.	\$1,450.00
ACCESSIBLE HOIST	19) Allow for new sling style accessible hoist in accordance with Specification D3.10 Accessible water entry/exit for swimming pools. Lifting capacity 150kg. 20) Allow for anchor footing system enabling sling to be temporarily stored.	\$18,000.00

Amenities Block 2 Replacement and Pool & Landscaping Refurbishment

COPING	21) Allow to resurface coping with paver, non-slip.	\$5,580.00
PAVING - concrete	22) Allow to resurface perimeter hardstand from pavers or new concrete layer (inc. colour and pattern), non-slip. 23) Allow to design and install pavement to achieve compliance with AS1428.1 area within pool fence.	\$31,212.00
TURF, GARDEN BED & PLANTING	24) Allow to renew grassed area with new turf. 25) New garden bed with native planting from shrubs no greater than 1.2 at full maturity, full length of south fence, 2 metre wide bed, outside of pool area.	\$13,000.00
SEATING	26) Remove existing seating 27) Allow for 3 new picnic tables. 28) Allow for 1 strip of continuous seating along eastern side of pool. Option price for sandstone logs, honed on top.	\$15,150.00
SHADE SAILS	29) Replace 2 shade sails from heavy duty, 100% block out, UV resistant material. 30) Repaint x6 posts to shade sails. + Raise 2 x posts 2000mm higher (depends on existing footings must be 40% of total Height)	\$19,728.00
POOL FENCE & GATE	31) New pool fence, match existing alignment, from powder coated aluminium vertical blades. 32) Replace gate, same location.	\$33,750.00
MAINTENANCE	33) All for 1 year pool water quality maintenance. Monthly Service 34) ALTERNATIVE - For Weekly Service - ADD \$10,750.00	\$4,670.00
TOTAL ex GST (\$)	\$	\$311,512.00

The Tenderer represents and warrants that it has allowed in the Price and the components of the Price shown in this Lump Sum Fee Breakdown for all costs and expenses it will incur in performing the Works.

The Tenderer acknowledges that the engagement for the entire duration of the Project is dependent upon government approval of the Project being obtained. Should the Project not be approved for any reason whatsoever, and without affecting any other right the Principal may have, the Principal may discontinue the engagement.

SCHEDULE OF RATES

Item	Price ex GST (\$)
FENCE (\$/m)	\$385.00
PAVEMENT (\$/m2)	\$204.00
TURF (\$/m2)	\$72.00
GARDEN BED INC. PLANTING (\$/m2)	\$125.00


Amenities Block 2 Replacement and Pool & Landscaping Refurbishment

METHODOLOGY & CPM

This document outlines Rockbuild's methodology as principal contractor to YMCA Yarramundi Projects to completion and ensure the works satisfy the requirements as designed by all documents provided by the client and relevant standards and codes.

The Contract works include Demolition, Civil Works, Concrete Works, Partitioning Works, Electrical Services, Hydraulics Services, Structural Components, Roofing Works, Tiling Works, Carpentry Works and Painting Works.

Rockbuild has undertaken a thorough inspection of all work areas at Yarramundi and have gained an extensive understanding of the Centre requirements, existing installation methodology, access methods, site constraints, foreseeable obstacles and a full understanding of the overall project requirements and expectations.

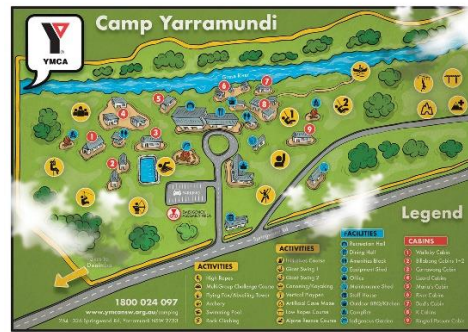

We believe that this will only be enhanced through further close consultation with all site staff and management which will enable Rockbuild to provide a quality and successful project. Using weekly meetings and regular updates we would ensure that all stakeholders are made aware of our work schedules and how they may affect them.

External Stakeholders

Careful and well-planned site management is essential to deliver a successful project. Rockbuild understands the importance of not only meeting direct expectations of our clients, but to ensure high consideration of all parties impacted by the contract works.

Rockbuild will work with management to understand the Camps schedule Intimately and ensuring that there is very little to no impact on any incoming Groups to the camp due to any construction/renovation works. A Rockbuild representative will be assigned as the single point of contact for all stakeholders to facilitate and expedite communication.

Where possible, Rockbuild will limit loud noise and machinery to reduce impact on users of the Camp. Dust protection mesh will be installed on fencing and scaffolding as required and the site cleaning is to be completed regularly to limit possible impacts of construction wastes.

Co-ordination will take place with staff where access around or near other tenancies is required.

Overview

The Yarramundi Project will entail the following process.

Amenities Block 2 Replacement and Pool & Landscaping Refurbishment

1. All workers and team members to complete all required documentation and induction processes for both Managers and Rockbuild prior to any works commence.
2. Proof of all inductions will be maintained by Rockbuild and provided on demand and prior to workers attending the site.
3. In co-ordination with the team, Rockbuild will commence site establishment including the setup of work storage areas with necessary site signage and fencing. We will notify the Project Managers as to which areas works will be commencing on including a detailed map and project management plan. This will be updated well before each work stage.
4. A detailed dilapidation report to be conducted of all surrounding areas where works are being undertaken.
5. During each Stage Construction work areas will be set up as per program details, including all required work path routes, safety signage, temporary barricading/ fencing and shade cloth and exclusion and work zones. Each stage will be of variable timing as per the Full Project Plan provided.



Amenities Block 2 Replacement and Pool & Landscaping Refurbishment

6. As each Stage is completed, we will notify management/certifier to inspect prior to moving to the next stage.
7. Once all site-specific works at all stages are completed Rockbuild will then perform a site inspection of the area against the outlined SOW and quality requirements.
8. Any external inspections (e.g.: private certifier, customer reps) will then be completed as per the final checks and inspections required to satisfy requirements.

Please note that as it stands within a staged sequential program, with the number of steps at each stage, the entire program will be at least 24-29 weeks.

Rockbuild is well versed and highly experienced in working within various environments and through effective supervision and contract administration all possible delays will be removed from these works

All necessary steps will be taken to ensure the delivery of a successful project.

Dilapidation Report

Rockbuild Group will have both a pre-start and post-completion dilapidation report carried out by a third-party consultant.

A dilapidation report will record / document any existing site issues in respect to the buildings the works are being carried out in, as well as the general common areas which may be impacted by the construction process.

Amenities Block 2 Replacement and Pool & Landscaping Refurbishment

Site Safety

Rockbuild has developed a comprehensive WHS plan to allow for the project to be delivered in a safe manner for all stakeholders involved. Rockbuild will have a dedicated site safety co-ordinator who will work with the projects team to ensure compliance and safety is always followed.



This Includes ensuring the following:

1. All contractors, staff and visitors are signed in and inducted to site, all required Rockbuild inductions completed.
2. All necessary PPE is to be worn and always utilised.
3. All working areas to be clearly planned with work and exclusion zones including all necessary signage and fencing.
4. Notification of areas to be worked within.
5. Quality inspections to be conducted to planned methodology.
6. Regular ongoing inspections of WHS and site documentation including toolbox talks, ITPs, inductions, and SWMS.
7. Rockbuild will implement appropriate traffic management controls within the site, during works and for all deliveries.
8. No Large rubbish to be left in the work compound zone. Waste removal will be conducted regularly.
9. Site cleaning to be completed thoroughly and regularly.
10. Our WHS system is Fully ISO Certified plus CM3 Prequalified
11. A copy of our WHS plan to be always present on site.


Hours of Work

Hours of work will be set in accordance with the requirements as laid out by the tender.

As per the requirement, hours of work will be Monday to Friday, 7:00 AM to 4:00 PM daily with no noisy works to be completed on weekends and public holidays.

Amenities Block 2 Replacement and Pool & Landscaping Refurbishment

Paths for Deliveries

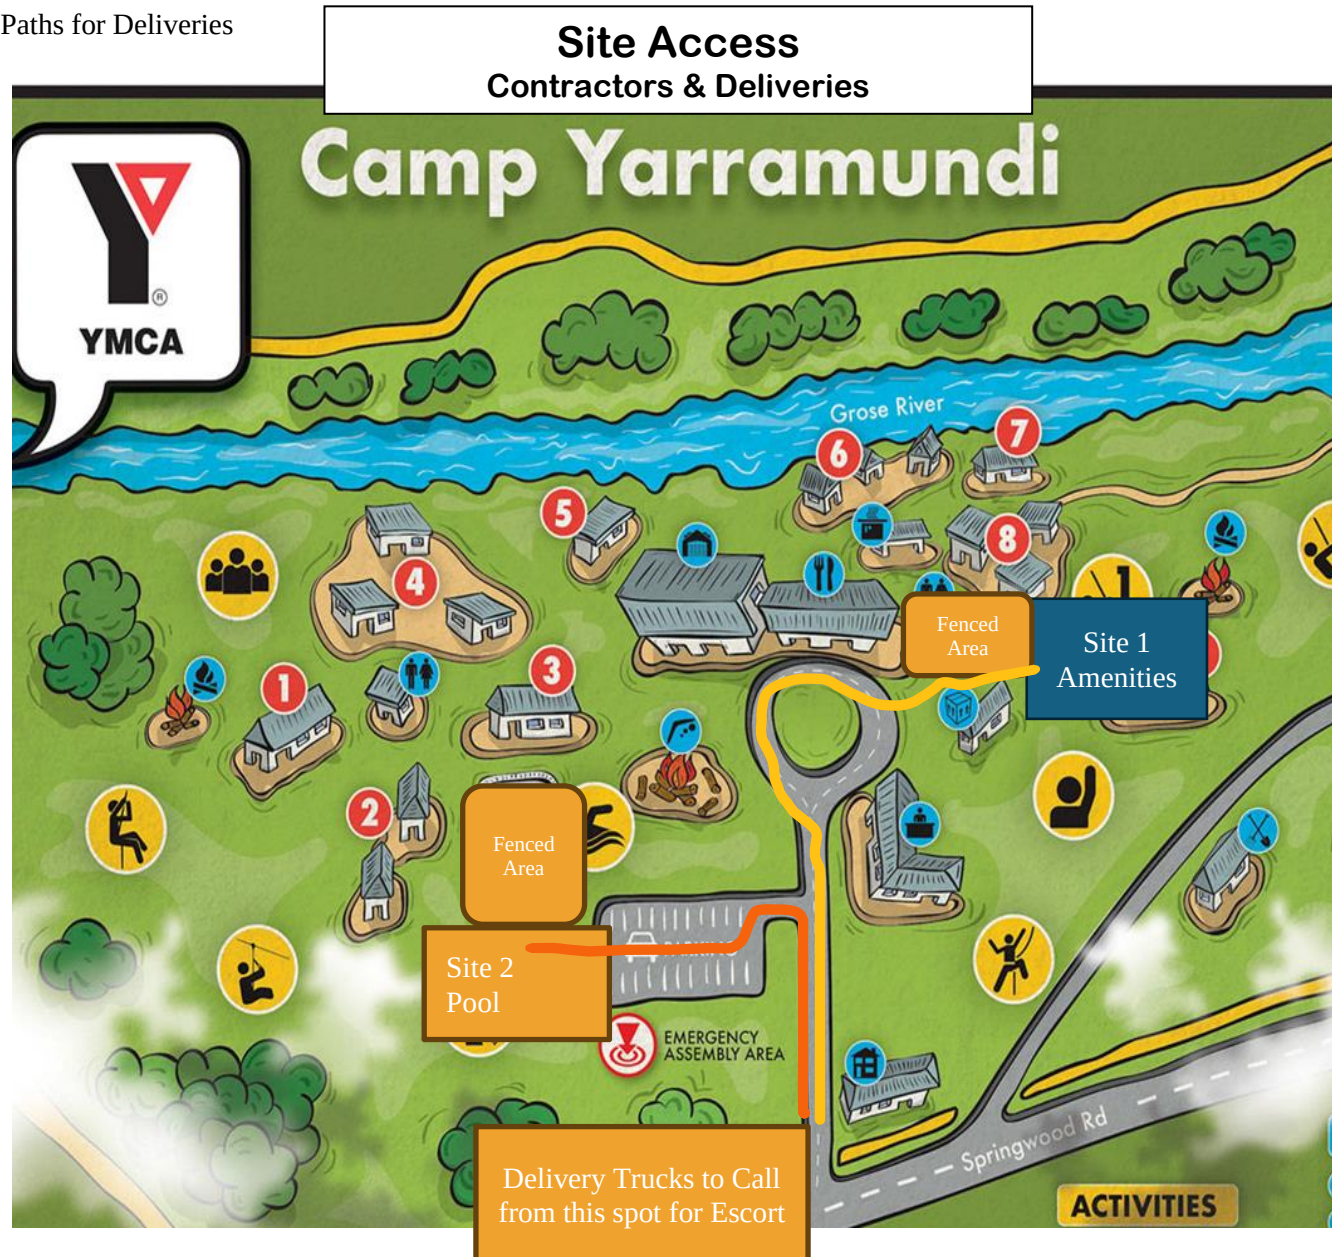

Site Conditions

Site 1

- New Amenities Construction Site.

Site 2

- Pool Refurbishment site

Deliveries

- All delivery vehicles to stop adjacent to the Yarramundi Site Entry and call the site Foreman
- Site Foreman to send Escort with signage to escort the delivery to the particular site 1 or site 2 Materials Compound

Material Storage

- A fenced off lockable site compound will be created adjacent to each work site for the storage of materials.

Fencing

- Each Work site will be surrounded by Lockable temporary fencing, fully signed with conditions of entry

Amenities Block 2 Replacement and Pool & Landscaping Refurbishment

Site Constraints

Rockbuild Group are well versed in delivering high standard construction within confined and restricted sites. This experience allows accurate and thorough planning for site coordination which includes but is not limited to: Access, WHS, Site Safety to Occupants / Residents, Deliveries, and General logistic requirements. Any site constraints will be discussed and established prior to the site establishment stage.

Site Amenities

Site workers and staff will utilise the dedicated temporary amenities provided by the site and/or Rockbuild and external to the building, unless directed otherwise.

Construction Site Services

The construction site will require the use of power, water, and sewer during the period of construction.

Rubbish Removal

Removal of rubbish from site is a continuous procedure and will be monitored daily. Removal will be carried out using both skip bins and tipper trucks.

Project Duration

Having reviewed the project requirements and developed the construction programme, we have calculated a project duration that considers any constraints identified and productivity rates based on similar projects and related experience, while also allowing for suitable contingencies.

From contract award and site mobilisation the target project duration is 24-29 Weeks, from site establishment to completion. Please refer to the Attached program included with the tender. If appointed, Rockbuild will provide a final, detailed program for client review. This project duration is based on unhindered access commencing upon site Establishment. Our program allows for a workflow that provides minimal disruption to all other site occupants, while still delivering the project in a timely manner

CPM – Critical Path Method

Phase 1 – Site Establishment

Prior to construction works commencing on site, Rockbuild will install temporary Hoarding/ fencing (Where required) to enclose the working areas and exclusion zones within the site if required. Warning and Safety signage will be displayed at the appropriate points around the perimeter of the site and work areas. Site amenities will be delivered and installed in the approved locations. A dilapidation report will be conducted prior to any commencement of works.

A finalised Project Management Plan will be issued for client review and subsequent implementation.

Phase 2 – Samples, Measurement and Demolition

Prior to any demolition, areas which could be potentially affected by the demolition works will be protected as necessary. All demolition works will be undertaken under constant supervision by an experienced and qualified Rockbuild Supervisor. Rockbuild intend to establish waste removal routes away from any resident trafficable areas to assist quick and safe waste handling from demolition areas to the skip/truck zones.

Demolition including the removal of existing fixtures and fittings will not occur until a delivery date for the new materials and fixtures has been established. This will minimise any unnecessary disruption.

Phase 3 – Service Works

Following the completion of the demolition and removal of debris materials the make good of any structural support members will be completed.

All services will be completed by others.

This will also be inspected by Rockbuild and any external consultants prior to the new Fit Out being installed.

Phase 4 – Finishes & Fit out

All noted areas will be completed as per the tender drawings and documents provided.

As per requirements of the tender, the certifier, engineer, and any other consultant (as required) will inspect and certify the works have been installed to the required standards.

Upon receipt of certifier sign off, removal of any high reach equipment and fencing will commence after all required make Goods have been completed. Final clean and preparation for building handover to commence once all equipment has been removed.

Amenities Block 2 Replacement and Pool & Landscaping Refurbishment

Phase 5 – Completion and Defects Management

Commissioning and Handover

This is a key and often neglected phase of building construction. Clear and efficient management of this stage of the project will ensure a clean handover of an operating and fully commissioned building to informed and trained building management.

Rockbuild will ensure comprehensive checklists will be prepared for the systems installed and will provide any necessary documentation. An essential phase of the project is the commencement and completion of all areas as per tender. The items identified shall include:

1. Pre commissioning checks and cleaning.
2. Inspection of all work elements and substrate prior to completion.
3. Structural engineering certification of the works.
4. Private Certification (Occupancy Certification)

Upon completion of the works, a final dilapidation inspection will occur, and a revised report will be issued to the client. A site walk through will be completed with the client at each interval stage and a final walkthrough once all works are completed.

Rockbuild will provide the client with required warranties, maintenance procedures and additional documentation (operations Manuals) to close out the project.

Rockbuild will demobilise all work zones including compounds, access equipment, general equipment and will provide a final clean to all areas.

Defects Management System

The strategy of Rockbuild's defects management system is to achieve minimal defects at practical completion. The elimination of defects arising during the construction stage or prior to the completion requires the application of an ongoing inspection and rectification requirements. Any required defects after practical completion will be carried out in a reasonable time.

The system Rockbuild applies to the management and control of quality issues and defects is designed to:

1. Ensure that tradesmen and their direct line supervisor see quality as their responsibility to enable quality issues to be resolved at the lowest possible level.
2. Ensure defects and quality issues are not allowed to accumulate.
3. Ensure inspections are carried out at the workface and that links are established with the existing Quality Assurance systems.
4. Motivate and facilitate a cultural change in attitude in accepting quality issues and defects not as being the norm.

To reduce the occurrence of defects and to ensure their appropriate and timely management and rectification, Rockbuild have adopted a system, which complements our Quality Management and Assurance Processes.

Amenities Block 2 Replacement and Pool & Landscaping Refurbishment

Our program is designed to address this situation by raising the profile of quality and improving the motivation of contractors and employees towards it, which includes:

1. Pre-commencement induction of the subcontractor's supervisors and employees to communicate Rockbuild's standards, expectations prior to commencement of on-site.
2. A system of inspections administered by the tradesmen and direct-line supervisors backed up with check-sheets to ensure checking is carried out by the tradesmen performing the work to identify and resolve problems at the lowest possible level and thereby focus on getting things right first time and eliminate the need for costly revisits.
3. A system of inspections carried out by Rockbuild supervisors to serve as a 'safety net' is a secondary. The principal quality inspections and sign off are undertaken by direct line supervisors and tradesmen.
4. The use of external specialist consultants, including Inhabit, to monitor quality workmanship and finishes during construction provides a third level of inspection and.
5. The use of completed tradesmen check-sheets and Rockbuild's check-sheets as a means of rating and scoring subcontractor's quality performance and identifying impediments to achieving the required quality.
6. The presentation and display of tradesmen and subcontractor ratings and scores through project newsletters or site notice board to add a competitive element to overcome resistance usually associated with other quality improvement.
7. The use of toolbox talks as a means of raising quality and defect issues with subcontractors/tradesmen.

On the project these strategies will be rigorously applied. Integral in the installation, commissioning and handover processes mentioned in the previous sections. Any defects and non-conformance items raised through these inspections will flow directly back into our Defects Management System to ensure rectification without delay.

Phase 6 – Certification

Rockbuild will be working on the requirements for sign off during the construction and defect rectification process. This is to minimise the delay between practical completion of construction and to finalise all certifiable requirements.



Applying new interior

