

Amenities Block 2 Replacement

ADDENDUM 01 (IN BLUE)

PROJECT DETAILS

Project	AMENITIES BLOCK 2 REPLACEMENT
Addendum	01

SCOPE & TENDER PRICE

Item	Specific Scope	Price (\$)
PRELIMINARIES & MARGIN	1) Allow to satisfy all condition of DA0167/21, dated 8/11/2021. Refer DA Matrix for allocation of responsibility. 2) Allow for all provisions set out in the Minor Works Contract. 3) Allow to coordinate Hawkesbury City Council & PCA inspections as required. 4) Allow to satisfy requirements of PCA to obtain Occupancy Certificate. 5) Contractor advertising signage will not be permitted. 6) Allow for tree protection to large tree adjacent to existing building.	\$
DESIGN & CONSULTANT FEES	7) Allow to finalise levels of the concrete access path surrounding the amenities In Compliance With AS1428.1. Minimum width of path to be 1.25m 1.5m. 8) Allow to re-establish level thresholds with 3 adjoining paths in each corner per attached Proposed Site Plan Sketch. 9) Allow to re-establish connecting with existing concrete path directly north including a few stairs (as required) including slip rated stair tactiles.	\$
DEMOLITION, EXCAVATION & FILL	10) Allow for all temporary disconnection / isolation of river water, potable water, gas, sewer, stormwater and power. 11) Allow to remove and dispose any GSW Asbestos Fill as a provisional sum. Supply tipping dockets to validate tonnage and any claim against the provision sum. 12) Allow for new fill to depth of 450mm 600mm under new slab and footpath. Ensure compliance with DA Condition 35. 13) Structural FFL of new slab to be approximately 200mm higher than existing slab. 14) New building to be approximately 1m further away from existing tree (moved towards west).	\$

Amenities Block 2 Replacement

	15) Allow for a battered ground around perimeter of slab as required to ensure slab edges are not exposed. Refer amenity block 1, finished with decomposed granite (or similar).	
FORM, CONCRETE, REO, PIERS	16) Per Structural Details. 17) Allow piercing per Structural Details	\$
PEST CONTROL	18) Allow for Termimesh Code Spec 1.11.5 or Similar 19) Allow Termiflange Code Spec 2.1a5 or Similar	\$
TIMBER FRAME	20) Per Structural Details 21) Allow to flip the direction of roof fall. High side (ridge) to the north.	\$
INSULATION	22) Allow for insulation in walls R2.0 23) Allow for insulation in roof R3.5	\$
ROOF AND WALL CLADDING	24) Allow for BAL 29 Rating requirements including a) Mesh screens b) Gutter guard c) Metal sheeting to timber doors exterior. d) Gutters from Colourbond. e) Downpipes from PVC painted.	\$
INTERNAL	25) Allow for internal linings to plant room. Line , set, stop and paint.	
SCREED, WATERPROOFING, TILING.	26) Allow for: a) Floor tile supply & install to all floors except Plant Room. Tiled floor area circa. 113 sqm b) Concrete to plant room floor, finished concrete surface. c) Linear drain d) Full height wall tiling. Tiled wall area circa. 255 sqm	\$
HYDRAULIC (WATER, SEWER, GAS)	27) Per design and specification. 28) Allow for x2 Commercial 28L Continuous Flow gas (LPG) hot water heaters by Thermann (same as block A).	\$
ELECTRICAL	29) Allow to replace existing main distribution board (currently fixed to the amenities building wall), to be relocated to the main dining room / kitchen building wall. Provide As-Built line diagram on completion. 30) Allow for new sub-meter board inside new plant room as required. 31) Allow x1 DGPO to plant room. X2 DGPOs to laundry. x1 DGPO in each bathroom (male, female and each accessible). 32) Allow for new power, lighting, emergency lights, smoke alarms, bollard and lights.	\$
WINDOWS AND DOORS	33) Allow for x4 sliding windows (2,400 x 300) in lieu of (2,400 x 600) located above showers. Raise RL windows to avoid foaling with shower rose. 34) Allow to satisfy BAL ratings. 35) Allow for window and door furniture	\$

Amenities Block 2 Replacement

	36) Allow for commercial grade door closers to x2 bathroom doors. 37) Aluminium meshed fly screens to all windows & doors (except plant room) 38) Glazed doors to be obscure glazing.	
SHOWER / TOILET PARTITIONS	39) Allow for 2400 2000 height shower and toilet partitions. 40) Allow to submit shop drawings to the Superintendent for review/ approval.	\$
PAINTING	41) Per Specification.	\$
FIXTURES & FITTINGS SUPPLY	Price to include: 42) WC 43) Basins & Basin Mixers 44) Shower Rose & Mixer (stage 1 selection not suitable) 45) Soap Holders (1 per shower) 46) Grab Rails, and retractable shower seat for accessible bathrooms only. 47) Statutory Signage 48) Hand Dryer x4 (2 per bathroom mounted on wall near entry door, 1 per accessible bathroom)	\$
TOTAL	CONTRACT SUM ex GST	\$
EXCLUSIONS	49) x4 Sliding Windows (2,400 x 600), supplied by Principal. 50) Toilet Roll Dispensers supplied and installed by YMCA 51) The Principal will engage and appoint the Accredited Certifier (AC) and Principal Certifying Authority (PCA) fees and procure the Construction Certificate (Urban City Certifying). 52) The Principal will fund the LSL and Contribution Payment. 53) Refer DA Matrix for items by the Principal	N/A

FFE SPECIFICATION

FFE ITEM	MAKE	MODEL
WC	TENDERER TO SPECIFY	TENDERER TO SPECIFY
BASIN	TENDERER TO SPECIFY	TENDERER TO SPECIFY
BASIN MIX	TENDERER TO SPECIFY	TENDERER TO SPECIFY
SHOWER MIX	TENDERER TO SPECIFY	TENDERER TO SPECIFY
HARDWARE	TENDERER TO SPECIFY	TENDERER TO SPECIFY
SOAP DISPENSER	TENDERER TO SPECIFY	TENDERER TO SPECIFY


Amenities Block 2 Replacement

SANITARY ITEMS AMENITIES BLOCK A



Amenities Block 2 Replacement

PROPOSED SITE PLAN SKETCH

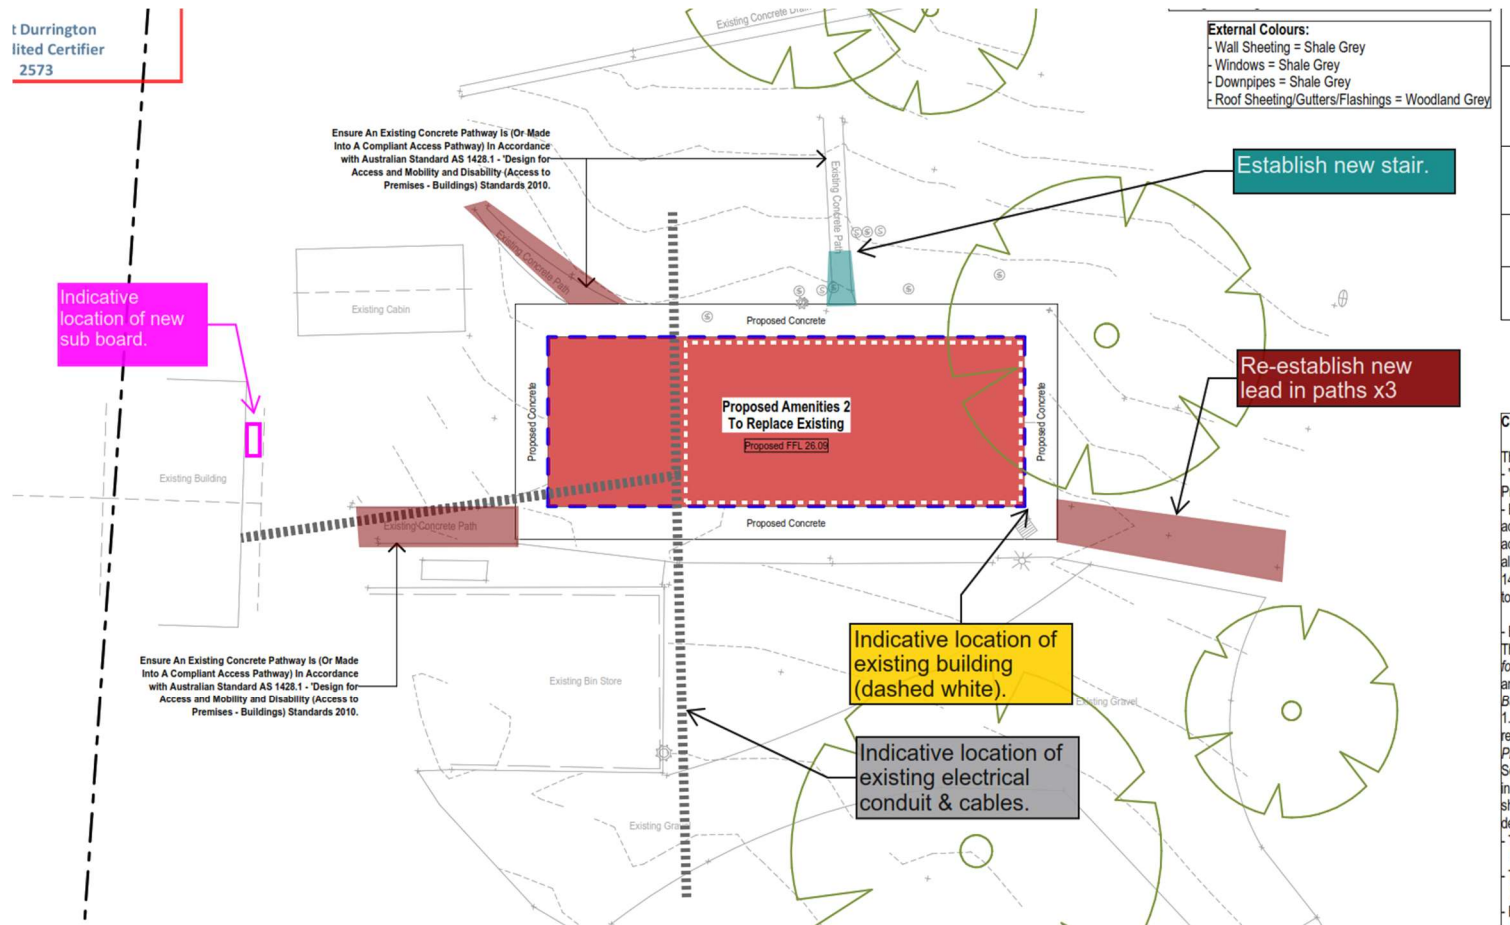

Pool & Landscaping Refurbishment

ADDENDUM 01 (IN BLUE)

PROJECT DETAILS

Project	POOL & LANDSCAPING REFURBISHMENT	
Addendum	01	24 JUN 2024

SCOPE & TENDER PRICE

Item	Scope	Price ex GST (\$)
PRELIMINARIES & MARGIN	1) Allow to secure site area noting works within a live environment. Note no contractor advertising signage will be permitted on site. 2) Allow for all provisions set out in the Minor Works Contract.	\$
DESIGN & CONSULTANT FEES	3) Allow to prepare return performance brief and accompanying concept design drawings by a registered landscape architect for Principal review/ approval. 4) Allow for 2 iterations of design.	\$
EMPTY AND CLEAN	5) Allow to empty pool and dispose water legally. 6) Remove accessories (lights, ladder, skimmer basket etc.) 7) Clean pool thoroughly and prep surface to create a suitable substrate.	\$
RESURFACE POOL	Option A – 2-part epoxy 8) Apply primer coat to enhance adhesion. 9) Apply new surface from 2-part epoxy according to manufactures guidelines, ensure proper coverage and uniform finish. Allow surface to cure property. 10) Apply sealant or finishing coat as required. Option B – Render interior with a quartz aggregate render (or similar)	\$
WATERLINE TILE	11) Supply and install waterline tile, 600 300 wide band.	\$
PUMP SYSTEM AND LINES.	12) Remove and disposed existing pumps system (pump and lines). 13) Supply and installed new pump system of suitable duty and a reputable brand (indicate brand in tender submission).	\$
PUMP & STORE ROOM	14) Replace pump house with new structure, double the size of existing pump house. Allow for 2 compartments each with their own door including x2 heavy duty key code locks. 1 compartment for the pump and 1 compartment for storage.	\$

Pool & Landscaping Refurbishment

	15) Allow to run power to both rooms, and fit off x2 DGPOs in each room. 16) Allow for Colour bond cladding (to match adjacent cabin), with sound insulation and internal lining.	
POOL COVER.	17) Allow to replace retractable pool cover.	\$
ACCESSIBLE HOIST	18) Allow for new sling style accessible hoist in accordance with Specification D3.10 Accessible water entry/exit for swimming pools. Lifting capacity 150kg. 19) Allow for anchor footing system enabling sling to be temporarily stored.	\$
COPING	20) Allow to resurface coping with paver, non-slip.	\$
PAVING	21) Allow to resurface perimeter hardstand from pavers or new concrete layer (inc. colour and pattern), non-slip. <i>Maintain current level. Refer sketch Proposed Plan Rev B.</i> 22) Allow to design and install pavement to achieve compliance with AS1428.1 area within pool fence.	\$
TURF, GARDEN BED & PLANTING	23) Allow to renew grassed area with new turf. <i>Add new turfed area on other side of pool, refer sketch B.</i> 24) New garden bed with native planting from shrubs no greater than 1.2 at full maturity, full length of south fence, 2 metre wide bed, outside of pool area.	\$
SEATING	25) Remove existing seating 26) Allow for 3 new picnic tables (<i>located just outside of pool fenced area</i>). 27) Allow for 1 strip of continuous seating along eastern side of pool. Option price for sandstone logs, honed on top.	\$
SHADE SAILS	28) Replace 2 shade sails from heavy duty, 100% block out, UV resistant material. 29) Repaint x6 posts to shade sails. <i>Increase height of x2 post (2 most short), from ~2.3 to ~4.3.</i>	\$
POOL FENCE & GATE	30) New pool fence, match existing <i>adjust alignment per Sketch Rev B</i> , from powder coated aluminium vertical blades (<i>or similar</i>). 31) Replace gate, same location.	\$
MAINTENANCE	32) All for 1 year pool water quality maintenance.	\$
TOTAL ex GST (\$)	\$	\$

SECTION 3 PRINCIPALS PROJECT REQUIREMENTS

Existing Dimensions (estimate only, to be confirmed by Contractor)	
Element	Dimension
Pool Width	6.5 m (inside face of coping to inside face of coping)
Pool Length	16.5 m (inside face of coping to inside face of coping)
Pool Depth	1.0 to 1.6 m
Pool Volume	~140 cubm (assume average depth of 1.3 m)
Coping Width	320mm
Coping Depth	350mm
Pavement	Width Varies, refer sketch.
Shade Sail	~5m x 12m
Fence Length	23 m
Fence Width	16 m

SKETCH PLAN EXISTING

CAMP VARRAMUNDI HAND SKETCH
FOR REFERENCE ONLY. →
21ST JUNE 2024

The sketch shows a rectangular site with an overall width of 17.9m and a total depth of 16m. The site is divided into several sections:

- Top Section:** A "TURF AREA (LUREM)" measuring 3.45m in depth. Above it is an "EXISTING FENCE" with three poles marked at approximately 4.3m(H), 3.9m(H), and 2.3(H). To the right of the turf area is a "PUMP ROOM" (3m x 1m) with a "SHADE CLOTH POLE" nearby. A "GATE" is indicated on the right side.
- Middle Section:** An "EXISTING CONCRETE SLAB" measuring 2.65m in depth. To the right of this slab is an area labeled "EXISTING PAVERS".
- Bottom Section:** A "POOL" measuring 2.65m in width and 11.6m in length. The "POOL DEPTH" is noted as ~1.6m. To the right of the pool is another "POOL" area with a "POOL DEPTH" of ~1m. Below the pool is another "EXISTING CONCRETE SLAB" measuring 2.8m in depth. To the right of this slab is an area labeled "EXISTING PAVERS".
- Right Side:** An "EXISTING FENCE" runs along the right edge. A "GATE" is indicated on the right side.
- Left Side:** An "EXISTING FENCE" runs along the left edge. A "GATE" is indicated on the left side.
- Bottom Section:** An "EXISTING FENCE" runs along the bottom edge. A "GATE" is indicated on the bottom side.
- Other Details:**
 - A "NOTE: COPING HEIGHT IS ~ 0.35m" is written on the left side.
 - A "N." arrow points towards the top-left corner.
 - Various dimensions are marked along the fences and within the sections.

CAMP VARRAMUNDI HAND SKETCH
FOR REFERENCE ONLY →
21ST JUNE 2024

EXISTING FENCE
16m
EXISTING CONCRETE SLAB
2.65m
EXISTING FENCE
0.32m
NOTE: COPING HEIGHT IS ~ 0.35m
N.

MOVE FENCE 1 MTS OUT
MOVE FENCE 2 MTS OUT

TURF
3.45m
~ 4.3m (H)
~ 3.9m (H)
~ 2.3 (H)
~ 2.3m (H)
~ 3.9m (H)
2.3m
17.9m

COLOURED CONCRETE
1.5 mts
EXISTING CONCRETE SLAB
2.65m
2.8m
1.5 mts
EXISTING CONCRETE SLAB
2.8m

POOL
POOL DEPTH ~ 1.6m
POOL DEPTH ~ 1m
POOL STRAITS
EXISTING PAVERS
~ 2m
~ 1m
~ 1m

NEW STORE ROOM & PUMP ROOM
EXISTING PAVERS
~ 2m
~ 1m
~ 1m

RAISE POLE ~ 2MTS
RAISE POLE ~ 2MTS

SHAPE CLOTH POLE

REDUCE width of concrete pavement to 1.5 mts wide (north and south side only)

COLOURED CONCRETE, MAINTAIN EXISTING RL

EXISTING FENCE

Amenities Block 2 Replacement

ADDENDUM 02

PROJECT DETAILS

Project	AMENITIES BLOCK 2 REPLACEMENT	
Addendum	02	27 JUN 2024
Tender Closing Date (Current)	Thursday 4 th July 2024.	
Tender Closing Date (New)	Thursday 11th July 2024.	

We are pleased to extend the tender period by 1 week and look forward to receiving your tender submission.

Rgs
Alex and Ben

Pool & Landscaping Refurbishment

ADDENDUM 02

PROJECT DETAILS

Project	POOL & LANDSCAPING REFURBISHMENT	
Addendum	02	27 JUN 2024
Tender Closing Date (Current)	Thursday 4 th July 2024.	
Tender Closing Date (New)	Thursday 11 th July 2024.	

We are pleased to extend the tender period by 1 week and look forward to receiving your tender submission.

Rgs
Alex and Ben

Amenities Block 2 Replacement

Existing Dimensions (estimate only, to be confirmed by Contractor)	
Element	Dimension
Pool Width	6.5 m (inside face of coping to inside face of coping)
Pool Length	16.5 m (inside face of coping to inside face of coping)
Pool Depth	1.0 to 1.6 m
Pool Volume	~140 cubm (assume average depth of 1.3 m)
Coping Width	320mm
Coping Depth	350mm
Pavement	Width Varies, refer sketch.
Shade Sail	~5m x 12m
Fence Length	23 m
Fence Width	16 m